

Magnetic Contactor แม่เหล็กลัด คอนแทคเตอร์



S-T10



S-T20




S-T21



S-T25

Type No. รุ่น	Rated operating current (AC3) กระแสใช้งาน		Max. Motor Capacity 3 Phase (AC3) ขนาดมอเตอร์สูงสุด		Thermal Current (AC1)	Standard Auxiliary Contact คอนแทคช่วย		Packing บรรจุ/ลัง	Price ราคา (฿)
	220-240V	380-440V	220-240V KW (HP)	380-440V KW (HP)		NO	NC		
S-T10	11	9	2.5 (3.5)	4 (5.5)	20	1NO	-	10	480.-
S-T12	13	12	3.5 (4.5)	5.5 (7.5)	20	1NO	1NC		510.-
S-T20	22	22	5.5 (7.5)	11 (15)	32	1NO	1NC	10	920.-
S-T21	22	22	5.5 (7.5)	11 (15)	32	2NO	2NC		950.-
S-T25	30	34	7.5 (10)	15 (20)	50	2NO	2NC		1,200.-

Outline and installation dimension

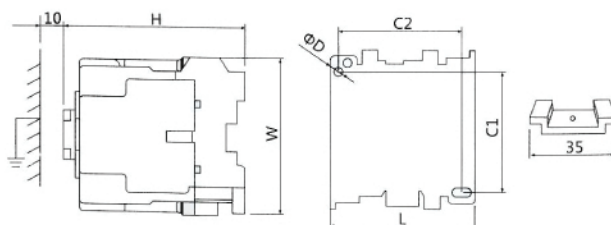

Type No. รุ่น	L	W	H	C1	C2	φD
S-T10	36	75	78	60	28	4.2
S-T12	44	75	78	60	30/35	4.2
S-T20						
S-T21	63	81	81	58	54	4.5
S-T25						

Overload Relay ไอเวอร์โหลดรีเลย์ 3 Elements

TH-T18




TH-T25




Type No. รุ่น	Rated Current	Packing บรรจุ/ลัง	Price ราคา (฿)
TH-T18 (ใช้กับรุ่น S-T10/12)	0.7 (0.55-0.85)	20	450.-
	0.9 (0.4-1.1)		
	1.3 (1-1.6)		
	1.7 (1.4-2)		
	2.1 (1.7-2.5)		
	2.5 (2-3)		
	3.6 (2.8-4.4)		
	5 (4-6)		
	6.6 (5.2-8)		
	9 (7-11)		
11 (9-13)			

Type No. รุ่น	Rated Current	Packing บรรจุ/ลัง	Price ราคา (฿)
TH-T25 (ใช้กับรุ่น S-T20/35)	3.6 (2.8-4.4)	20	550.-
	5 (4-6)		
	6.6 (5.2-8)		
	9 (7-11)		
	11 (9-13)		
	15 (12-18)		
	*22 (18-26)		

Outline and installation dimension

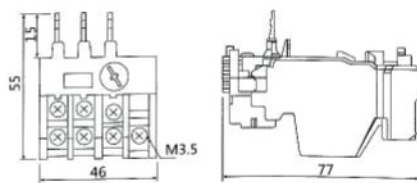

TH-T18

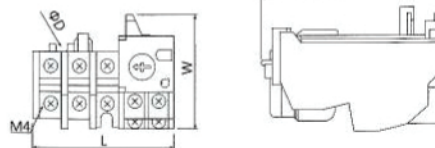

TH-T25

Type No. รุ่น	L	W	H	ΦD
TH-T25	63	51	81	4.5

No Fuse Breaker โนฟิวส์ เบรกเกอร์



NF30-CW



NF63-CW



NF125-CW



NF250-CW




NF400-CW



NF630-CW

Type No. ຊຸ	Rated Current (A)	Short capacity (kA) AC400V	Operate short circuit (kA) AC400V	Packing ຸສຸງ/ລັງ		Price ລາຄາ (฿)	
				2P	3P	2P	3P
NF30-CW	5A, 10A, 15A, 20A, 30A	1.5	1	10	10	700.-	800.-
NF63-CW	10A, 15A, 20A, 30A, 32A, 40A, 50A, 63A	5	2	10	10	950.-	1,100.-
NF125-CW	32A, 40A, 50A, 63A, 8A, 100A, 125A	18	10	10	10	1,350.-	1,700.-
NF250-CW	125A, 150A, 160A, 200A, 250A	-	18	-	10	-	2,800.-
NF400-CW	250A, 300A, 350A, 400A	-	25	-	1	-	9,500.-
NF630-CW	500A, 600A, 630A	-	36	-	1	-	20,000.-

Outline and installation dimension

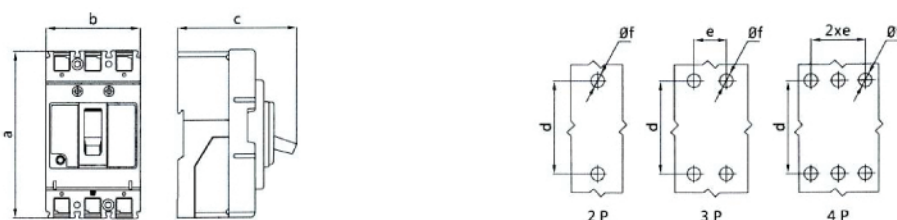

Type No. ຊຸ	Dimension (mm.)					
	A	B	C	D	E	F
NF30-CW 2P	96	45	64	84.5	-	5
NF30-CW 3P	96	67	64	84.5	24	5
NF63-CW 3P	130	75	89	111	25	4.5
NF125-CW 2P	130	59	90	110	-	5
NF250-CW 3P	165	105	90	126	35	5
NF400-CW 3P	258	140	153	195	45	8
NF630-CW 3P	275	210	150	243	70	8