


# tend CABLE GLAND

เคเบิลกลอน

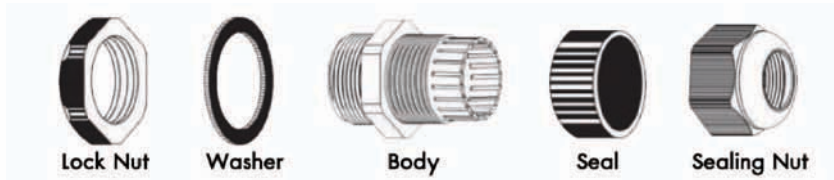

- Thread : PG, PF and NPT
- Material : NYLON 66 (L 94V-2)
- Operating temperature : 40 °C ~ 100 °C

Type	Color		Cable Ø	Wrench L1	OD (Thread)		Length (Thread) A/E	Packaging PCS	Remark	Price
	Black	Gray			L2					
PG7	HPG7	HPG7GR	3-6.5	12.4	8		17/15	50		29.-
PG9	HPG9	HPG9GR	4-8	15.1	8		22/19	50		32.-
PG11	HPG11	HPG11GR	5-10	18.5	8		24/22	50		32.-
PG13.5	HPG13.5	HPG13.5GR	6-12	20.3	9		27/24	50		40.-
PG16	HPG16	HPG16GR	10-14	22.3	10		30/27	50		40.-
PG21	HPG21	HPG21GR	13-18	28	11		36/33	50		60.-
PG29	HPG29	HPG29GR	18-25	36.8	11		46/42	10		100.-
PG36	HPG36	HPG36GR	22-32	47	14		59/54	10		110.-
PG42	HPG42	HPG42GR	30-38	53.8	14		65/60	10		140.-
PG 48	HPG 48	HPG 48GR	34-44	58.1	15		70/65	10		175.-
PF 1/2"	HPF 12	HPF 12GR	6-12	20.5	9		27/24	50		80.-
NPT 3/8"	HPN 38	HPN 38GR	5-10	17	15		-/24	50	Without nut	32.-
NPT 1/2"	HPN 12	HPN 12GR	10-14	21.3	15		-/27	50		40.-
NPT 3/4"	HPN 34	HPN 34GR	13-18	26.6	15		-/33	50		60.-
NPT 1"	HPN 11	HPN 11GR	18-25	33.6	15		-/42	10		100.-
NPT 1 1/4"	HPN 114	HPN 114GR	22-32	42.1	17		-/54	10		110.-

# tend

## CABLE GLAND

### เคเบิลกลอง



- Thread : PG, PF and NPT
- Material : NYLON 66 (L 94V-2)
- Operating temperature : 40 °C ~ 100 °C

Type	Color		Cable Ø	Wrench L1	OD (Thread)		Length (Thread) A/E	Packaging PCS	Price
	Black	Gray			L2				
M12 x 1.5	HPM12	HPM12GR	3-6.5	11.8	15		17/15	50	44.-
M16 x 1.5	HPM16	HPM16GR	5-10	15.8	15		22/22	50	52.-
M20 x 1.5	HPM20	HPM20GR	10-14	19.8	15		27/27	50	64.-
M25 x 1.5	HPM25	HPM25GR	13-18	24.8	15		33/33	50	92.-
M32 x 1.5	HPM32	HPM32GR	18-25	31.8	15		42/42	10	158.-
M40 x 1.5	HPM40	HPM40GR	22-32	39.9	18		50/53	10	175.-
M50 x 1.5	HPM50	HPM50GR	30-38	49.9	18		59/60	10	220.-
M63 x 1.5	HPM63	HPM63GR	34-44	62.9	18		70/65	10	280.-