


MODEL	RATIO (A)	BURDEN (VA)	CLASS	ราคา(บาท)
MSQ-40	30/5	2.5	3	170
MSQ-40	40/5	2.5	3	170
MSQ-40	50/5	2.5	3	170
MSQ-40	60/5	5	3	170
MSQ-40	100/5	5	3	170
MSQ-40	150/5	10	1	170
MSQ-40	200/5	10	1	170
MSQ-40	250/5	15	1	170
MSQ-40	300/5	15	1	170
MSQ-40	400/5	15	1	170

MSQ-60	400/5	15	1	245
MSQ-60	500/5	15	1	245
MSQ-60	600/5	15	1	245
MSQ-60	800/5	15	1	245

MSQ-100	1000/5	15	1	330
MSQ-100	1200/5	15	1	390
MSQ-100	1500/5	15	1	390
MSQ-100	1600/5	15	1	590
MSQ-100	2000/5	15	1	590
MSQ-100	2500/5	15	1	1320


MSQ-130	1000/5	15	1	380
MSQ-130	1200/5	15	1	430
MSQ-130	1500/5	15	1	430
MSQ-130	1600/5	15	1	590
MSQ-130	2000/5	15	1	1320
MSQ-130	2500/5	15	1	1320
MSQ-130	3000/5	15	1	1320
MSQ-130	4000/5	15	1	2200

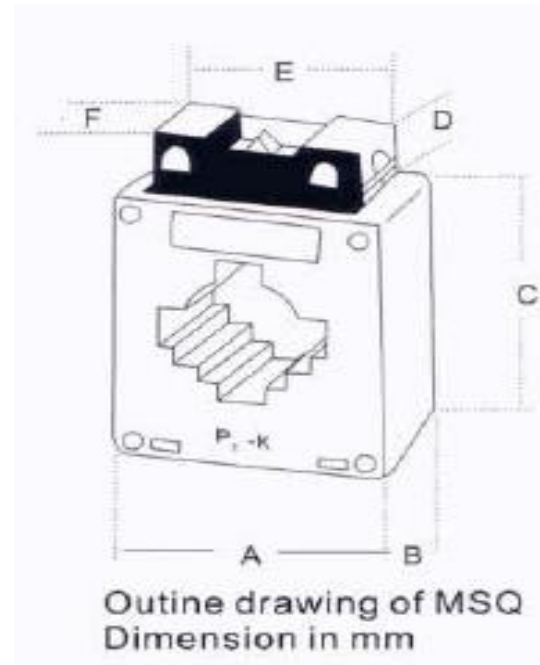

Model	Rated Current(A) Primary/Secondary	Busbar Hole Dimension	Rated Burden (VA)	Accuracy Class	Rated Voltage	Rated Frequency
MSQ-30	50/5A-300/5A	30 × 10mm	2.5-5	1.0	600V	50/60Hz
MSQ-40	150/5A-500/5A	40 × 10mm	5	1.0	600V	50/60Hz
MSQ-60	400/5A-1200/5A	60 × 20mm	10	1.0	600V	50/60Hz
MSQ-100	800/5A-3000/5A	100 × 10mm	15	1.0	600V	50/60Hz
MSQ-130	2000/5-4000/5A	130 × 10mm	15	1.0	600V	50/60Hz

Dimension of Case Unit:M/M

Model	A	B	C	D	E	F
MSQ-30	75	43	82	17	60	31
MSQ-40	75	43	82	17	60	31
MSQ-60	101	45	112	17	60	31
MSQ-100	145	45	139	17	60	31
MSQ-130	194	45	210	17	60	31

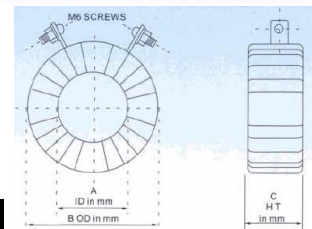

GENERAL VIEW OF THE PR & MR SERIES CT

MR MEASURING CURRENT TRANSFORMER

MODEL	RATIO (A)	BURDEN (VA)	CLASS	ID (mm)	HT (mm)	ราคา(บาท)
MR-130	1000/5	30	1	85	20	2400
MR-130	1200/5	30	1	85	20	2400
MR-130	1500/5	30	1	85	20	2400
MR-130	1600/5	30	1	85	20	2400
MR-170	2000/5	30	1	120	20	2800
MR-170	2250/5	30	1	120	20	2800
MR-170	2500/5	45	1	120	20	3200
MR-170	3000/5	45	1	120	20	4000